

WeldTec®

Where Quality and Innovation Never Ends

UNIQUE "TWISTER™" POWER CABLE TAKES THE STRAIN AND STRESS OUT OF TIG WELDING



PATENTED MADE IN U.S.A.

POWER CABLE



Patented swivel power cable connection allows the TIG torch head to "twist" or rotate around the power cable eliminating hand stress and strain associated with other brand torches power cables assemblies.

The swivel action provides:

- **Precise torch control for all welding positions**
- **Less hand and wrist fatigue**
- **Perfect for welding pipe, tube or out of position welds**
- **Longer lasting power cables**

Unique swivel power connection is now standard on all WeldTec® air cooled torch power cables, either non-conductive rubber cables (R) or soft flexible over braided rubber power cables (SF). Both of these special Twister™ power cables can be retro-fitted to most similar torch models on the market. See back.

WT-9 SERIES - 125 amps, Air Cooled (uses WT-9 and WT-20 front end parts)

Power Cable Choices:

- Non-conductive Rubber Hose (RT)
- Soft Flex – over braided Rubber Hose (SFT)
- Length Choices, 12.5 ft. (-12) or 25 ft. (-25)

- WT-9 Standard Model
- WT-9F Flex Neck Model
- WT-9FV Flex Neck & Gas Valve Model
- WT-9P Pencil Style Model
- WT-9V Gas Valve Model

WT-17 SERIES - 150 amps, Air Cooled (uses WT-17, 18, 26 front end parts)

Power Cable Choices:

- Non-conductive Rubber Hose (RT)
- Soft Flex – over braided Rubber Hose (SFT)
- Length Choices, 12.5 ft. (-12) or 25 ft. (-25)

- WT-17 Standard Model
- WT-17F Flex Neck Model
- WT-17FV Flex Neck & Gas Valve Model
- WT-17V Gas Valve Model

WT-26 SERIES - 200 amps, Air Cooled (uses WT-17, 18, 26 front end parts)

Power Cable Choices:

- Non-conductive Rubber Hose (RT)
- Soft Flex – over braided Rubber Hose (SFT)
- Length Choices, 12.5 ft. (-12) or 25 ft. (-25)

- WT-26 Standard Model
- WT-26F Flex Neck Model
- WT-26FV Flex Neck & Gas Valve Model
- WT-26P Pencil Style Model
- WT-26V Gas Valve Model



TEC WELDING PRODUCTS, INC. • PO BOX 1870 • SAN MARCOS, CA 92079 • (760) 747-3700


www.tectorch.com

e-mail: Info@tectorch.com

www.weldtec.com

WeldTec® RETRO-FIT TWISTER™ STYLE POWER CABLE ASSEMBLIES

Where Quality and Innovation Never Ends

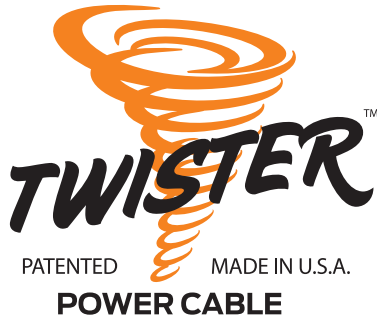

FITS MOST TIG TORCH BRANDS

TORCH MODELS, 9 & 17 SERIES

Retro-Fit Twister™ Power Cables for 9 and 17 torch models

- 57Y01RT 12.5 ft. Twister air cooled rubber hose power cable assembly
- 57Y01SFT 12.5 ft. Twister air cooled soft flex over braided power cable assembly
- 57Y03RT 25.0 ft. Twister air cooled rubber hose power cable assembly
- 57Y03SFT 25.0 ft. Twister air cooled soft flex over braided power cable assembly

TORCH MODEL, 26 SERIES

Retro-Fit Twister™ Power Cables for 26 torch models

- 46V28RT 12.5 ft. Twister air cooled rubber hose power cable assembly
- 46V28SFT 12.5 ft. Twister air cooled soft flex over braided power cable assembly
- 46V30RT 25.0 ft. Twister air cooled rubber hose power cable assembly
- 46V30SFT 25.0 ft. Twister air cooled soft flex over braided power cable assembly

INSTALLATION / RETRO-FIT

Retro-fit Twister™ power cables simply replace the existing power cable on most TIG torches regardless of brand.

CAUTION: Be sure welding machine is turned off or disconnected from power source before installation.

Simply pull handle back up the power cable using twisting motion, unscrew the power cable connection to torch body and replace with Twister™ power cable of similar style, tighten the connection snugly and reposition the handle, you're done.



TEC WELDING PRODUCTS, INC. • PO BOX 1870 • SAN MARCOS, CA 92079 • (760) 747-3700

www.tectorch.com

e-mail: Info@tectorch.com

www.weldtec.com