



MACHINE MODEL	TORCH MODEL - DINSE ADAPTER			
TIG TORCH Series	9, 17, 24 1 piece power cable	26 1 piece power cable	All Water Cooled Torches	
Miller®	KEY	KEY	KEY	
Syncrowave 180, 200, 210 SD	3538GT	H 3578G-GT	I 3578W-GT	K
Syncrowave 250 DX, 350 LX w/stud	3538 + 35MA	C,L 3578G + 35MA	E,L 3578W + 35MA	J,L
Syncrowave 250 DX, 350 LX	3538-18	D 3578G-18	F 3578W	J
Syncrowave 300, 400	3538-18	D 3578G-18	F 3578W	J
Dynasty 200, 210, 280, 300, 400	3538-18	D 3578G-18	F 3578W	J
Dynasty 700, 800	N/A	N/A	Use Miller Conn.	
Maxstar 150 STL, 161	2538GT	G N/A	N/A	
Maxstar 200, 210, 280, 400	3538-18	D 3578G-18	F 3578W	J
Maxstar 700, 800	N/A	N/A	Use Miller Conn.	
Pipeworx	3538 + 35MA	C,L 3578G + 35MA	E,L 3578W + 35MA	J,L
XMT 304, 350, 350 FieldPro, all w/dinse	3538	C 3578G	E 3578W	J
<b>Multi-Process</b>				
Dynasty 300 Multi-Process	2538-18	D 3578G-18	F 3578W	J
Maxstar 280 Multi-Process	3538-18	D 3578G-18	F 3578W	J
Multimatic 200, 215, 220	2538GT	G N/A	N/A	
Multimatic 235, 255	3538-18	D 3578G-18	F 3578W	J
<b>Lincoln®</b>				
Square Wave 200 AC/DC	3538GT	H 3578G-GT	I 3578W-GT	K
Square Wave 275	3538GT	H 3578G-GT	I 3578W-GT	K
Precision TIG 185, 225	3538GT	H 3578G-GT	I 3578W-GT	K
Precision TIG 275/375	1pc Cable + PCA 2-4	3578G + 35AS11	F,M 3578W + 35AS11	J,M
Invertec 155 S	2538	A N/A	N/A	
Invertec 160 T	3538GT	H 3578G-GT	I 3578W-GT	K
ASPECT 230, 375	3538GT	H 3578G-GT	I 3578W-GT	K
Flextec 450, Ranger 260MPX	3538 + 35MA	C,L 3578G +35MA	E,L 3578W + 35MA	J,L
<b>Multi-Process</b>				
POWER MIG 210MP	3538	C 3578G	E N/A	
POWER MIG 215MP	3538GT	C 3578G-GT	E 3578W	
<b>ESAB®</b>				
Miniarc 140, 150	2538	A N/A	N/A	
Miniarc 161LTS	2538-18	B N/A	2578W	
ET 141i, 186i	3538-18	D 3578G-18	F 3578W	J
ET 220i, 303i	3538-18	D 3578G-18	F 3578W	J
Heliarc 281i, 353i	3538-18	D 3578G-18	F 3578W	J
<b>Multi-Process</b>				
Fabricator 141i	2538	A N/A	N/A	
Rebel 205ic	3538-18	D 3578G-18	F 3578W	J
Rebel 215ic	3538	C 3578G	E N/A	
Rebel 235ic	3538-18	D 3578G-18	F 3578W	J
Rebel 285ic	3538-18	D 3578G-18	F 3578W	J
Renegade ET300iP	2538-18	D 3578G-18	F 3578W	J
Note: Heliarc 281i, 353i, Renegade ET 300iP have 1/4" BSP male gas connections on panel				
<b>FORNEY®</b>				
180ST	3538	A 3578G	N/A	
220ST PRO	3538-18	B 3578G-18	3578W	
220 AC/DC TIG	3538-18	C 3578G-18	E 3578W	
<b>Multi-Process</b>				
140MP	2538	D N/A	N/A	J
220MP	3538-18	D 3578G-18	F 3578W	J

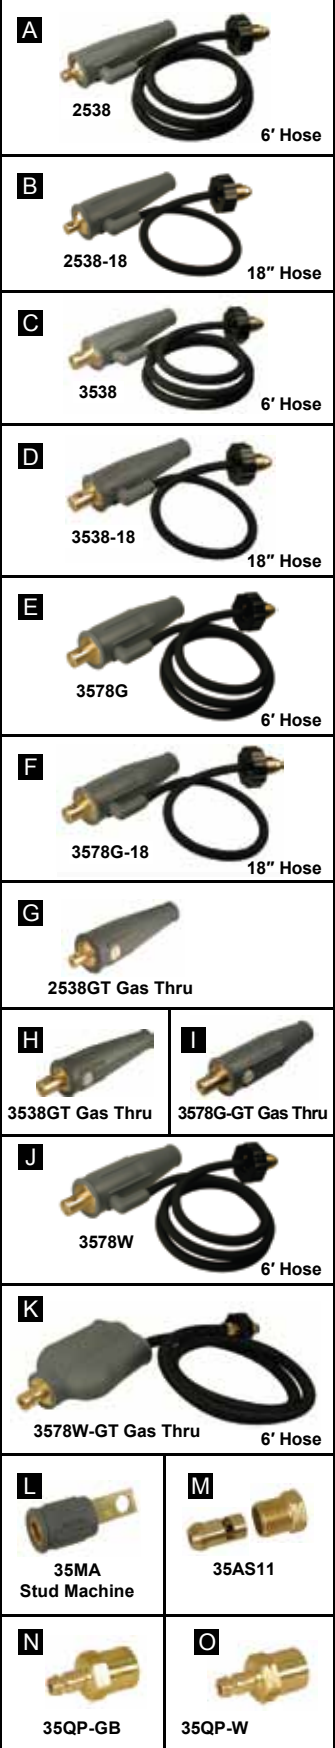

### DIMENSIONAL INFORMATION

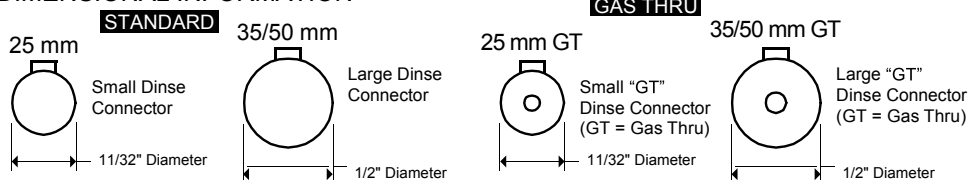

Note: Threaded stud machine & engine drives use 1/2" threaded studs, use 35MA machine adapter plus dinse adapter.

REV. 2023